

# Multi Conductor

**Conductor construction** is soft drawn bare copper meeting the requirements of ASTM Specification B-3. The 18 awg conductors are solid copper.

The insulation is a color coded high quality polyvinylchloride (PVC) for systems applications of up to 600 volts and conductor temperatures up to 60° C. The outer jacket is linear low density, high molecular weight, sunlight resistant, polyethylene (PE) with a nylon cord.

**Application:** Suitable for use as direct burial control cable for wiring central control systems to field controls.

**Conductor:** Soft drawn bare copper (ASTM Spec. B-3), Solid (18 awg).


**Insulation:** Color coded polyvinylchloride (PVC)

**Outer Jacket:** Black polyethylene (PE)

**Temperature:** 60° C

**Voltage:** 600 volts

Conductor Size and No.	Conductor Insulation	Outer Jacket
18-2	.015	.030
18-3	.015	.030
18-4	.015	.030
18-5	.015	.030
18-6	.015	.030
18-7	.015	.030
18-8	.015	.030
18-9	.015	.030
18-10	.015	.030
18-12	.015	.030
18-13	.015	.030
18-16	.015	.030
18-19	.015	.030
18-25	.015	.030

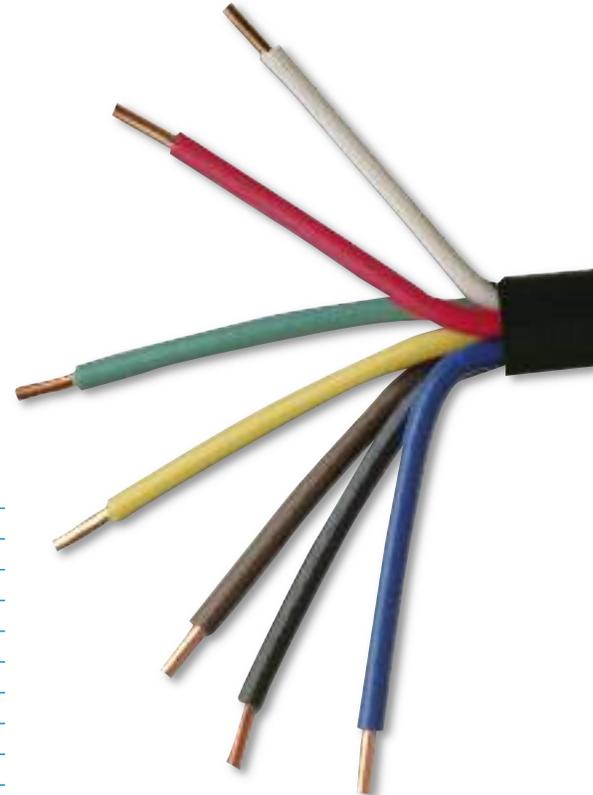

**RoHS**  
Compliant

