

Bare Copper Wire

Soft Drawn Bare Copper,
Suitable for Grounding Purposes

Awg Size	Stranding	Wt./1000'	Std. Pkg.
14	Solid	12.4	2 x 2000', 4 x 500', 2 x 1000'
12	Solid	19.8	2 x 1250', 4 x 500', 2 x 1000'
10	Solid	31.5	2 x 800', 4 x 500', 1 x 1000'
8	Solid	50	4 x 500', 1 x 1000'
6	Solid	79.5	4 x 315', 1 x 500', 1 x 1000'
4	Solid	126.3	4 x 200', 1 x 500', 1 x 1000'
2	Solid	200.9	2 x 125', 1 x 500', 1 x 1000'
8	7 Str	51	4 x 500', 1 x 1000'
6	7 Str	81	4 x 315', 1 x 500', 1 x 1000'
4	7 Str	128.9	4 x 200', 1 x 500', 1 x 1000'
2	7 Str	204.9	2 x 125', 1 x 500', 1 x 1000'



Tray Cable, Type TC-Direct Burial

PVC Insulation with THHN/THWN
Inners, 600 V Rating

Part #	Desc.	Wt./1000'	Std. Pkg.
123CTC(P)	12 Str / 3 Cond.	141	1 x 500, 1 x 1000
103CTC(P)	10 Str / 3 Cond.	209	1 x 500, 1 x 1000
083CTC(P)	8 Str / 3 Cond. w/grd.	323	1 x 500, 1 x 1000
063CTC(P)	6 Str / 3 Cond. w/grd.	536	1 x 500, 1 x 1000
043CTC(P)	4 Str / 3 Cond. w/grd.	701	1 x 500, 1 x 1000
023CTC(P)	2 Str / 3 Cond. w/grd.	1020	1 x 500, 1 x 1000

Put-Up Code(P): 1-500', 2-1000'




Hunter® Twisted Decoder Cable

Soft Drawn Bare Copper,
PE, 600 V Rating

Awg Size	Stranding	Wt./1000'	Std. Pkg.
14	Solid	43.4	1 x 500, 1 x 1000, 1 x 2500
12	Solid	61.6	1 x 500, 1 x 1000, 1 x 2500

Put-Up Code(P): 1-500', 2-1000', 5-2500'



Hunter® Twisted Decoder Cable Jacketed

Soft Drawn Bare Copper,
PE, 600 V Rating

Awg Size	Stranding	Wt./1000'	Std. Pkg.
14	Solid	55.6	1 x 500, 1 x 1000, 1 x 2500
12	Solid	75	1 x 500, 1 x 1000, 1 x 2500

Put-Up Code(P): 1-500', 2-1000', 5-2500'



Parallel Communication Cable

Soft Drawn Bare Copper,
PVC, 600 V Rating

Awg Size	Stranding	Wt./1000'	Std. Pkg.
14	Solid	80	1 x 500, 1 x 1000, 1 x 2500
12	Solid	103	1 x 500, 1 x 1000, 1 x 2500

Put-Up Code(P): 1-500', 2-1000', 5-2500'



Toro® Decoder Cable

Soft Drawn Bare Copper,
PE, 600 V Rating

Awg Size	Stranding	Wt./1000'	Std. Pkg.
14	Solid	76	1 x 500, 1 x 1000, 1 x 2500

Put-Up Code(P): 1-500', 2-1000', 5-2500'




Communication Cables

Soft Drawn Bare Copper

Part No.	Awg Size	No. of Pairs	Wt./1000'	Std. Pkg.
PE-39	19	6	167	1 x 500, 1 x 1000
PE-89	22	6	78	1 x 500, 1 x 1000
PE-54	19	3	84	1 x 500, 1 x 1000
DBS203P	20	3	59.7	1 x 500, 1 x 1000
1804S	18	2	65	1 x 500, 1 x 1000

Put-Up Code(P): 1-500', 2-1000'

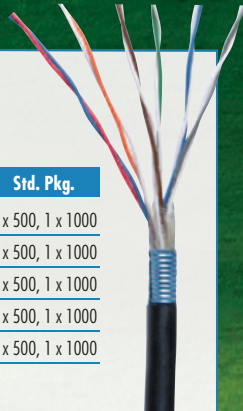

Toro® Communication Cable

Soft Drawn Bare Copper,
PVC, 600 V Rating

Awg Size	Stranding	Wt./1000'	Std. Pkg.
16	7 Strand	54	1 x 500, 1 x 1000, 1 x 2500

Put-Up Code(P): 1-500', 2-1000', 5-2500'

