


PE – 39 COMMUNICATION CABLE-R7315D

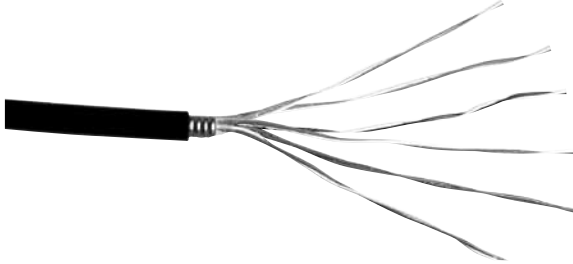

DESCRIPTION:

Regency's PE – 39 Communication Cable is a six (6) pair cable manufactured for the purpose of direct burial systems communication applications in accordance with the National Electric Code.

Conductor construction is soft drawn bare copper meeting the requirements of ASTM Specification B-3. The conductors are 19 awg solid copper.

The conductors are insulated with polyethylene (PE) in distinctive colors to facilitate pair identification and are twisted into pairs with varying lays to minimize crosstalk.

The interstices between the pairs are filled with Waterbloc compound and covered with a non-hygroscopic core wrap. The inner and outer surfaces of the core wrap are coated with Waterbloc compound.

The assembly is then longitudinally wrapped with a corrugated .008" (0.2 mm) thick copolymer-coated aluminum tape. This tape reduces the possibility of shield corrosion and lightning damage. The outer surface of the shield is flooded with Enviroblock compound. The outer jacket is polyethylene (PE).

APPLICATION:

Suitable for use as direct burial communication applications where protection against water and moisture entry is a critical requirement. PE – 39 is recommended where rodent attack is possible.

CONSTRUCTION:

CONDUCTOR: Soft drawn bare copper (ASTM Spec. B-3).

Solid (19 awg)

INSULATION: Polyethylene (PE)

OUTER JACKET: Polyethylene (PE)

TEMPERATURE: 60° C

VOLTAGE: 600 Volts

RESISTANCE: 8.523 OHMS PER M FEET at 68 DEG. F

Number of Pairs	Outside Diameter	Cable Weight
6	.61 in.	137/M'